

FARO® Laser Scanner Focus^s 350

The world's most popular terrestrial laser scanner with ultra-high accuracy and ingress protection

FARO®



ACCURACY

The Focus^s now captures environments with increased accuracy regarding distance, dual-axis compensator and angular measurement.



TEMPERATURE

Extended temperature range allows scanning in challenging environments - take your Focus^s to the desert or run a project in Antarctica.



ON-SITE COMPENSATION

With the on-site compensation functionality users can verify and adjust the Focus^s compensation on-site or in the office, ensuring the highest scan data quality. A comprehensive compensation document is automatically generated.



IP RATING - CLASS 54

With the sealed design, the Focus^s is certified with the industry standard Ingress Protection (IP) Rating and classified in class 54 against environmental influences.



HDR PHOTO OVERLAY

The HDR camera captures detailed imagery easily while providing a natural color overlay to the scan data captured under extreme brightness gradients.



ACCESSORY BAY

With this future-proof interface users can connect additional accessories to the scanner, which offers an option for user specific customization.

LASER SCANNER FOR LONG-RANGE APPLICATIONS

The Focus^s series is the latest addition to FARO's popular, compact, lightweight and intuitive laser scanner product line. The devices of this series are the most forward-thinking laser scanners on the market, adding several customer-centric features, such as Ingress Protection Rating (IP54), increased scanning accuracy and range, an internal accessory bay and a built-in on-site compensation routine.

The Focus^s 350 combines all benefits from FARO's well-known Focus^{3D} Laser Scanners with today's most innovative features to perform laser scanning in both indoor and outdoor environments - truly mobile, fast and reliable.

The FARO Focus^s 350 provides the next level of laser scanning for all applications in industries like Construction, BIM/CIM, Public Safety and Forensics.

BENEFITS

- ▶ Scanning in rough environments while providing protection from dust, debris and water splashes
- ▶ Confident data quality through the on-site compensation
- ▶ Reality-like scan data by increased distance accuracy and angular accuracy
- ▶ Future-proof investment and expandability due to the integrated accessory bay
- ▶ Easy handling of scanner control through its large and luminous touchscreen

PERFORMANCE SPECIFICATIONS

Ranging unit

Unambiguity interval: 614m for 122 to 488 kpts/s
307m for 976 kpts/s

Reflectivity	90% (white)	10% (dark-gray)	2% (black)
Range ¹	0.6-350 m	0.6-150 m	0.6-50 m

Ranging noise ²	@10m	@10m - noise reduction ³	@25m	@25m - noise reduction ³
90% reflectivity	0.3mm	0.15mm	0.3mm	0.15mm
10% reflectivity	0.4mm	0.2mm	0.5mm	0.25mm
2% reflectivity	1.3mm	0.65mm	2mm	1mm

Measurement speed (pts/sec): 122,000 / 244,000 / 488,000 / 976,000

Ranging error⁴: ±1mm

Angular accuracy⁵: 19 arcsec for vertical/horizontal angles

3D position accuracy⁶: 10m: 2mm / 25m: 3.5mm

Color unit

Resolution: Up to 165 megapixel color

High Dynamic Range (HDR): Exposure Bracketing 2x, 3x, 5x

Parallax: Minimized due to co-axial design

Deflection unit

Field of view (vertical⁷/horizontal): 300° / 360°

Step size (vertical/horizontal): 0.009° (40,960 3D-Pixel on 360°) / 0.009° (40,960 3D-Pixel on 360°)

Max. vertical scan speed: 97Hz

Laser (optical transmitter)

Laser class: Laser class 1

Wavelength: 1550nm

Beam divergence: 0.3mrad (1/e)

Beam diameter at exit: 2.12mm (1/e)

Data handling and control

Data storage:

Scanner control:

SD, SDHC™, SDXC™; 32GB card
Via touchscreen display and WLAN connection. Access by mobile devices with HTML5

Interface Connection

WLAN:

802.11n (150Mbit/s), as Access Point or client in existing networks

Integrated Sensors

Dual axis compensator:

Performs a leveling of each scan with an accuracy of 19 arcsec valid within ±2°

Height sensor:

Via an electronic barometer the height relative to a fixed point can be detected and added to a scan.

Compass⁸:

The electronic compass gives the scan an orientation.

GNSS:

On-site Compensation

Creates a current quality report and provides the option to improve the devices compensation automatically.

Accessory Bay

The accessory bay is located on top of the laser scanner and is used to connect versatile accessories to the scanner.

SYNERGY POSITIONING SYSTEMS


3/52 Arrenway Drive, Albany

Auckland, New Zealand

Free Call: 0800-867-266 Phone: +64-9-476-5151

Fax: +64-9-476-5140 Email: info@synergypositioning.co.nz

Website: www.synergypositioning.co.nz

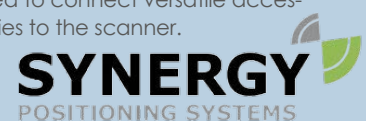

¹ For a Lambertian scatterer. ² Ranging noise is defined as a standard deviation of values about the best-fit plane for measurement speed of 122,000 points/sec. ³ A noise-reduction algorithm may be activated by averaging raw data. ⁴ Ranging error is defined as a systematic measurement error at around 10m and 25m. ⁵ On-site compensation required. ⁶ For distances larger 25m add 0.1mm/m of uncertainty. ⁷ 2x150°, homogenous point spacing is not guaranteed. ⁸ Ferromagnetic objects can disturb the earth magnetic field and lead to inaccurate measurements. ⁹ Low temperature operation: scanner has to be powered on while internal temperature is at or above 15°C, high temperature operation: additional accessory required, further information on request | All accuracy specifications are one sigma, after warm-up and within operating temperature range; unless otherwise noted. Subject to change without prior notice.

GENERAL

Power supply voltage: 19V (external supply)
14.4V (internal battery)

Power consumption: 15W idle, 25W scanning,
80W charging

Battery service life: 4.5 hours

Operating temperature: 5° - 40°C

Extended operating temperature⁹: -20° - 55°C

Storage temperature: -10° - 60°C

Ingress Protection: IP54

Humidity: Non-condensing

Weight incl. battery: 4.2kg

Size: 230 x 183 x 103mm

Maintenance / calibration: Annual



Global Offices: Australia ▪ Brazil ▪ China ▪ France ▪ Germany
India ▪ Italy ▪ Japan ▪ Malaysia ▪ Mexico ▪ Netherlands
Philippines ▪ Poland ▪ Portugal ▪ Singapore ▪ Spain ▪ Switzerland
Thailand ▪ Turkey ▪ United Kingdom ▪ USA ▪ Vietnam

www.faro.com
Freecall 00 800 3276 7253
info.emea@faro.com

